


# Decal Instructions

## Roland D.VI Fuselage Decal

**PDW-501230**

Apply decals to a fuselage that is assembled, filled, sanded, and painted with a coat of gloss white. Trim each decal and allow to soak for 15 minutes in warm water before you attempt to remove the decal from the backing paper.

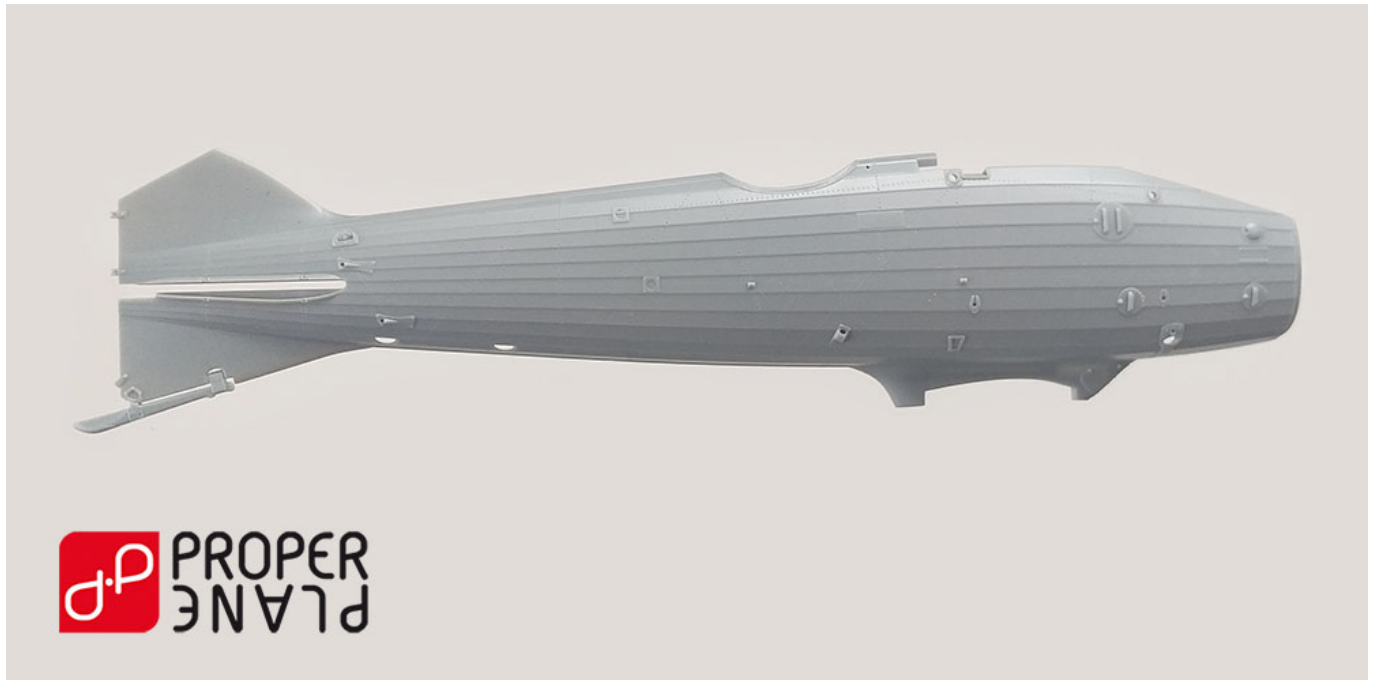

1. Apply the four fuselage decals in the numbering sequence shown on the sheet: bottom fuselage decals then top fuselage decals.



2. The fuselage decals may stretch. Use a hobby knife to trim the decals after they dry.



3. Cut pieces of the rectangular decal to fit areas not covered by the fuselage decals and trim after drying if needed.
4. Apply a decal setting solution and allow to dry overnight.



5. Trim the 'finger joint' decals and apply around the fuselage from the front to the back. Note that decals use transparent film to achieve a realistic, 'blended' finish on your model.



6. Apply setting solution. After the decals dry, you can apply kit decals.



23/07/2020